




Technical Specifications

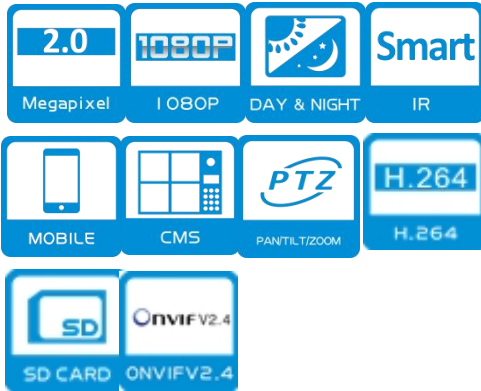

Camera	
Model	AX-M36PM-IP-2.0
Sensor	1/3" CMOS 2MP Panasonic34220
Output pixel	1920x1080/30fps 1920x1080/25fps
Lens	36X 4.6mm~165mm
BLC	Support
AGC	Auto/Manual
WB	Indoor/Outdoor/Auto/Manual
DNR	2DNR,3DNR
WDR	WDR≥79dB
S/N Ratio	≥50dB
Dome	
Communications Protocol	TCP/IP, HTTP, NTP, IGMP, DHCP, UDP, SMTP, RTP, RTSP, ARP, DDNS, DNS, HTTPS, P2P
Software Control	IE, CMS, Management Platform, P2P
Mobile View(optional)	Android , iPhone
Rotation range	Pan:0~360°,Tilt:0~93°
Rotation speed	Pan: 0~80°/s , Tilt:0~40°/s
Auto Flip	Horizontal 180°,Vertical 93°
Preset Points	220pcs presets (dwell time 01-60s interval available)
A-B scan	User programmabel(scan speed 1-64 levels setting available)
Guard Tours	8 groups(Max.16 points, dwell time user selectable)
Pattern Scan	4 pcs(Max 15 minutes.max.512 commands)
Time scheduling Function	6 tasks
PWR On Action	Memory/Pattern 1/Tour 1/360° scan/A-B scan/Park 1/None
Park Mode	Pattern 1/Tour 1/360° scan/A-B scan/Park 1/None
Park Time	1-60mins setting available
video compression	H.264/H.265M-JPEG
audio compression	G711, PCM
Operating temperature	-40℃~+60℃
Operation menu	Mutiple languages:English,Italian,Spanish etc.
Power	DC12V 4A / (AC24V 3A optional)
Consumption	≤25W
Lightning Protection	Transient voltage 6000V
Related validation	IP66,CE,FCC,RoHs
IR parameters	
Auto Control IR LED	PWM
IR distance	Up to 60 meters
LEDs	6PCS Array 42Mil IR LED
Support ambient light detection	IR illumination on 1-9 grades selectable
Packing size	inner box: 29.5x28x17 ; Carton box: 60x38x61
Weight	2kg/1pc ; 18kgs/carton(8pcs per carton)

Feature

- Outdoor Waterproof 7" PTZ Camera, 1/3"CMOS,1080P, 2.0MP,36X ZOOM Lens, IR CUT,60M IR
Compatible with CMS,UC2, Milestone, NUUO and AXON platform.etc
ONVIF2.4 ; Compatible with HIKVISION, DAHUA, XM, Video park NVR .etc
- Optional function: Alarm,Audio,SD Card slot**