ANSON Enerson
Work Together For a Safe World!
CE RoHS
Shenzhen Enerson Technology Co., LTD.
Hongkong Enerson Industrial Co., LTD.
Address: 4F, Block 3, Bantian The Third Industrial Park, Banxuegang Road, Bantian, Longgang District, Shenzhen, China
Mail: info@cctv-ax.net
Tel: 0086 755 2818 8843
Web: www.cctv-ax.com

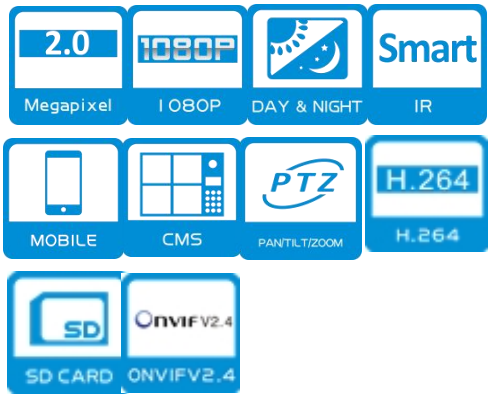

Feature

- Outdoor Waterproof 7” PTZ Camera, 1/3''CMOS,1080P, 2.0MP,20X ZOOM Lens, IR CUT,60M IR
  Compatible with CMS,UC2, Milestone, NUUO and AXXON platform.etc
  ONVIF2.4 ; Compatible with HIKVISION, DAHUA, XM, Video park NVR .etc
  Optional function: Alarm,Audio,SD Card slot

Technical Specifications

Camera	
Model	AX-M20PM-IP-2.0
Sensor	1/3" CMOS 2MP Sony323
Output pixel	1920*1080@30fps 1920*1080@25fps
Lens	20X f=4.7mm~94mm
BLC	Support
AGC	Auto/Manual
WB	Indoor/Outdoor/Auto/Manual
DNR	2DNR,3DNR
WDR	DWDR
S/N Ratio	≥50dB
Dome	
Communications Protocol	TCP/IP, HTTP, NTP, IGMP, DHCP, UDP, SMTP, RTP, RTSP, ARP, DDNS, DNS, HTTPS, P2P
Software Control	IE, CMS, Management Platform, P2P
Mobile View(optional)	Android , iPhone
Rotation range	Pan:0~360°,Tilt:0~93°
Rotation speed	Pan: 0~80°/s , Tilt:0~40°/s
Auto Flip	Horizontal 180°,Vertical 93°
Preset Points	220pcs presets（dwell time 01-60s interval available）
A-B scan	User programmabel(scan speed 1-64 levels setting available)
Guard Tours	8 groups(Max.16 points, dwell time user selectable)
Pattern Scan	4 pcs(Max 15 minutes.max.512 commands)
Time scheduling Function	6 tasks
PWR On Action	Memory/Pattern 1/Tour 1/360° scan/A-B scan/Park 1/None
Park Mode	Pattern 1/Tour 1/360° scan/A-B scan/Park 1/None
Park Time	1-60mins setting available
video compression	H.264/H.265M-JPEG
audio compression	G711, PCM
Operating temperature	-40℃~+60℃
Operation menu	Mutiple languages:English,Italian,Spanish etc.
Power	DC12V 4A / (AC24V 3A optional)
Consumption	≤25W
Lightning Protection	Transient voltage 6000V
Related validation	IP66,CE,FCC,RoHs
IR parameters	
Auto Control IR LED	PWM
IR distance	Up to 60 meters
LEDs	6PCS Array 42Mil IR LED
Support ambient light detection	IR illumination on 1-9 grades selectable
Packing size	inner box: 29.5x28x17 ; Carton box: 60x38x61
Weight	2kg/1pc ; 18kgs/carton(8pcs per carton)